VERSUS 120 12VDC/24VDC

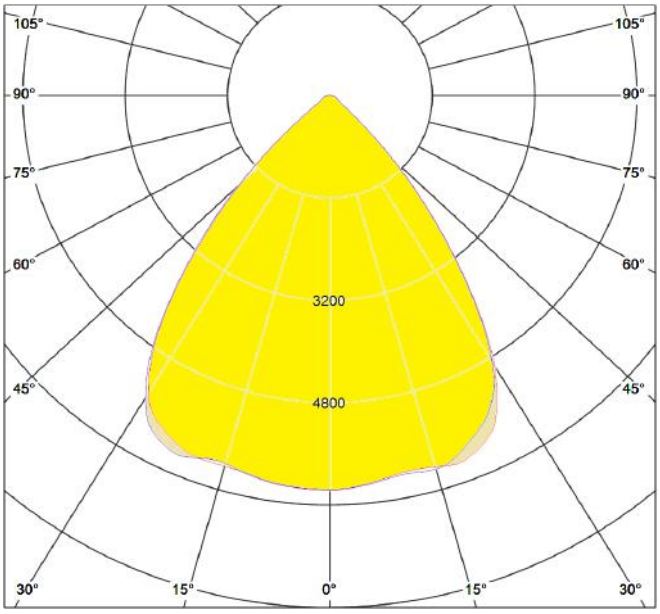

ΤΕΧΝΙΚΑ ΧΑΡΑΚΤΗΡΙΣΤΙΚΑ

Nominal power	118W-123W
Flux	20.414 - 21.279 Lm
Led efficacy	197 Lm/W @ Tj=25ºC
System efficacy	173 Lm/W
Led modules	Bridgelux®
Color temperature	5000K/4000K/3000K/2000K
CRI	70
Optics	Molded optical silicone compound with superior efficiency and lifetime
Lense angles	30º, 75º, 100º, 150º and various asymmetric lenses
Ingress protection	IP65
Impact protection	IK07
Operating temperature range	-30ºC/+50ºC
Length	470mm
Width	220mm
Height	110mm
Weight	5,2 Kg
Warranty	5 years
Main reference standards	EN 60598-1, EN 60598-2-5, EN 60529, EN 62262, EN 55015, EN 62471, EN 61547, EN 61000-3-2, EN 61000-3-3

*Η τελική φωτεινή ροή του φωτιστικού εξαρτάται από τον εκάστοτε συνδυασμό οπτικού, τροφοδοτικού και από τη θερμοκρασία χρώματος του led chip

ΗΛΕΚ. ΧΑΡΑΚΤΗΡΙΣΤΙΚΑ

Power supply	Fixed
Voltage range	12-18VDC / 18-32VDC
Safety standards	EAC-TP-TC 004
EMC standards	Compliance to EN55015, EN1000-4-2,3,4,5,6,8 , EN61547, EAC TP TC 020
Led chip lifetime (Bridgelux)	L90B00 50.000 hours at 25ºC Ta L80B20 70.000 hours at 25ºC Ta L70B30 100.000 hours at 25ºC Ta

ΥΛΙΚΑ

Fixing-cooler	Aluminum alloy 6063
Optics	Silicone compound
Bracket	Stainless Steel 316L