


# Specification Sheet



**VERSUS 140 Classic**  
Flood LED Light

## Polar Curves

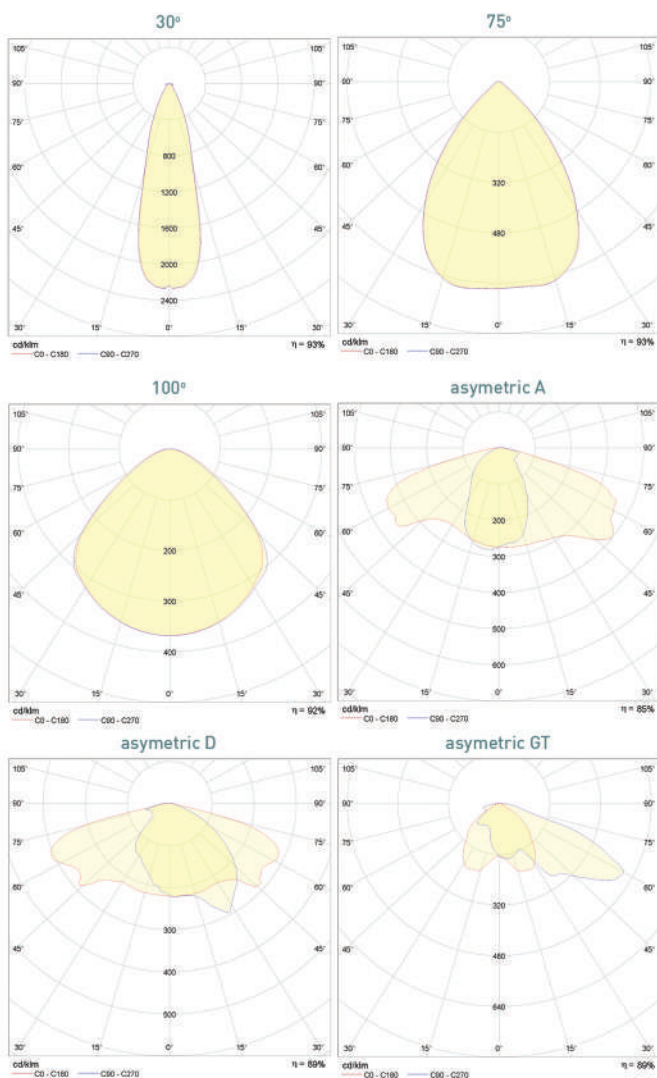

## Technical Characteristics

Nominal Power	138-145 W
Flux	Up to 21000 Lm
LED Efficacy	197 Lm/W at T <sub>j</sub> =25° C
System Efficacy	Up to 150 Lm/W
LED Module	Bridgelux®
Color Temperature	5000K/4000K/3000K/2000K
CRI	70
Optics	Optical Silicone Compound
Lens Angle	30°, 75°, 100°, 150° & various asymmetric lenses
Ingress Protection	IP66
Impact Protection	IK07
Operation Temp. Range	-30°C/+50°C
Length-Width-Height	385 x 200 x 80 mm
Weight	4.0 kg
Warranty	5 Years
Main Reference Standards	EN 60598-1, EN 60598-2-5, EN 60529, EN 62262, EN 55015, EN 62471, EN 61547, EN 61000-3-2, EN 61000-3-3,

## Electrical Characteristics

Power Supply	MeanWell
Voltage Range	100-305 V/AC
Frequency	47-63 Hz
Power Factor	≥ 0,95 at 230 V/AC
Power Supply Lifetime	> 50.000 hours
Dimmable	NO
Power Supply Features	Input surge protection 4kV line-line 6kV line-earth
LED Chip Lifetime (Bridgelux)	L80B20 70.000 hours at 25°C Ta L70B30 100.000 hours at 25°C Ta

## Materials

Fixing-Cooler	Aluminum Alloy 6063 - Anodized
Optics	Optical Silicone Compound
Bracket	Stainless Steel 316L

